


In-Wall *Rear Projection* SMART Board™ Interactive Whiteboard

Specifications – Model 1910

Physical Specifications

Size	Interactive Whiteboard 72 1/4" W x 55 1/4" H x 2 5/8" D (183.5 cm x 140.3 cm x 6.7 cm) Pen Tray with Keyboard Bracket 38 1/4" W x 9 5/8" H x 4 5/8" D (97.2 cm x 24.4 cm x 11.8 cm) Active Screen Area 67 1/4" W x 50 3/8" H (170.8 cm x 128.0 cm) 84" (213.4 cm) diagonal
Installation Information	Minimum Wall Opening 68 5/8" W x 54 3/8" H (174.3 cm x 138.1 cm) The interactive whiteboard must be mounted between two studs that run from floor to ceiling.
Weight	105 lb. (47.6 kg)
Shipping Weight	160 lb. (72.6 kg)
Shipping Size	77" W x 65" H x 26" D (195.6 cm x 165.1 cm x 66.0 cm)

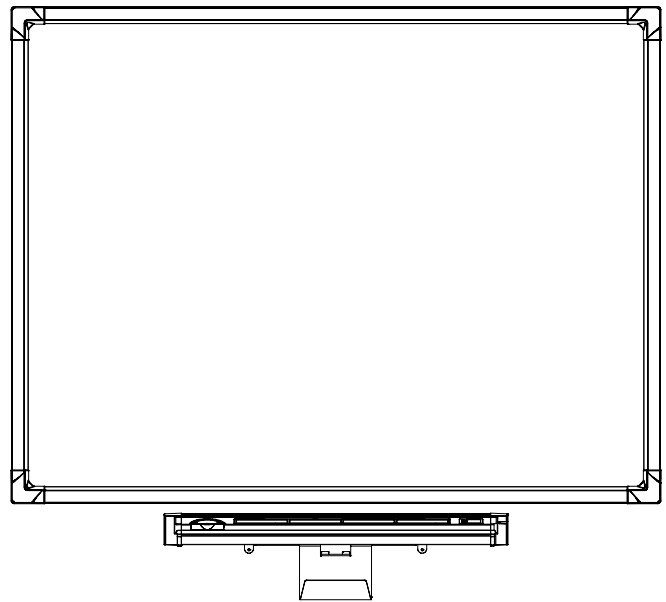

All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	SMART Board software and Notebook™ software. Free software upgrades are available at www.smarttech.com/support/software/index.asp .
Pen Tray	Optical sensors in the pen tray detect when a pen or the eraser is lifted from the tray. LED indicators show the active tool. Includes four Whisper-tip™ pens (black, blue, red and green) and one eraser.
Keyboard Bracket	Bracket attaches to the wall below the pen tray to hold the wireless keyboard and IR receiver
Wireless Keyboard	US English Windows® operating system with built-in trackball (all regions except Japan)
Resolution	Touch resolution approximately 2000 x 2000. Supports all projector resolutions up to 1600 x 1200.
SMART Super Screen	Bright image with uniform light distribution. Suitable for high ambient lighting, specifically meeting rooms or videoconferencing rooms.
Screen Surface Material	Extremely durable, low-reflection (matte) finish reduces glare from overhead lights
Digitizing Technology	DViT™ (Digital Vision Touch) technology uses digital cameras to track an object interacting with the display surface
Projector	A projector is <i>not</i> included with this model of SMART Board interactive whiteboard. To take advantage of all interactive features, you must integrate a projector.
Computer Connection	A 21' 6" (6.6 m) SMART USB adapter cable is included
Power Supply	A switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, with a 6' (1.8 m) country-specific power cord
Power Requirements	Power consumption is approximately 50 watts
Warranty	Two-year limited equipment warranty

SMART Board Software 9.5 Computer Requirements

Windows Computers Pentium® II 450 MHz processor
128 MB of RAM (256 MB recommended)
136 MB of free hard disk space for minimum installation (511 MB for full installation with Gallery collections)
Windows NT® 4.0 (SP6), Windows 98 operating system or later
Microsoft Internet Explorer® 6.0 or later
Macromedia® Flash® player version 8

NOTE: The AirLiner™ wireless slate requires the Windows 2000 or Windows XP operating system.

Requirements for SMART Video Player Pentium II 450 MHz processor (700 MHz or faster recommended)
Windows 98 operating system or later. Does not run on the Windows NT operating system.
Microsoft® DirectX® technology 8.1 or later

Mac Computers 700 MHz processor (1 GHz or faster recommended)
128 MB of RAM (256 MB recommended)
Mac OS X versions 10.3.9 and 10.4.x
148 MB of free hard disk space for minimum installation (423 MB for full installation with Gallery collections)
Safari™ 1.3.2 or later
SMART Board software version 9.5 supports Intel® processors (Universal Binary)

NOTE: Previous versions of SMART Board software are compatible with earlier versions of the Mac OS X operating system. To download a previous version of SMART Board software, go to www.smarttech.com/support/software/sb_mac_other.asp.



Storage and Operating Specifications

Storage -40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing

Operation 41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing


Specifications – Model 1910

Front and Side Views

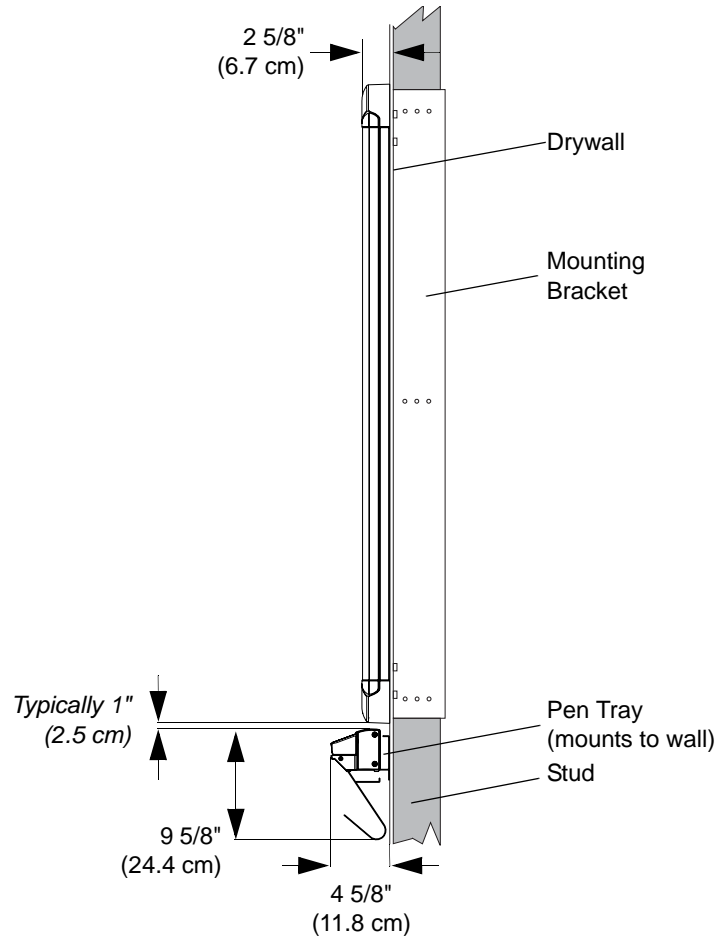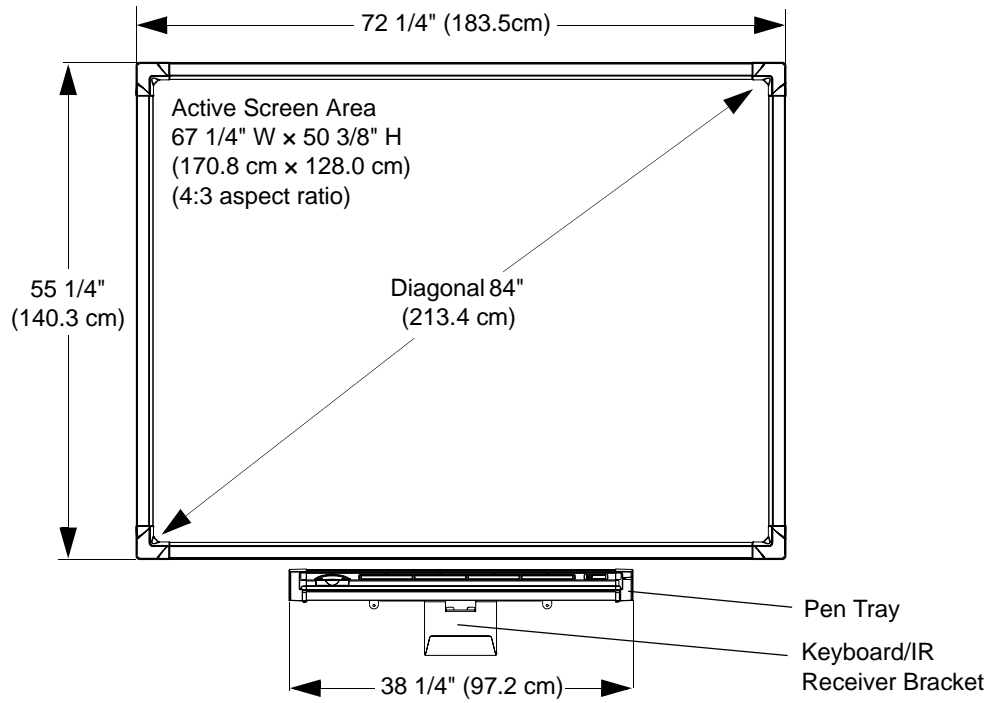

Specifications – Model 1910

Wall Opening

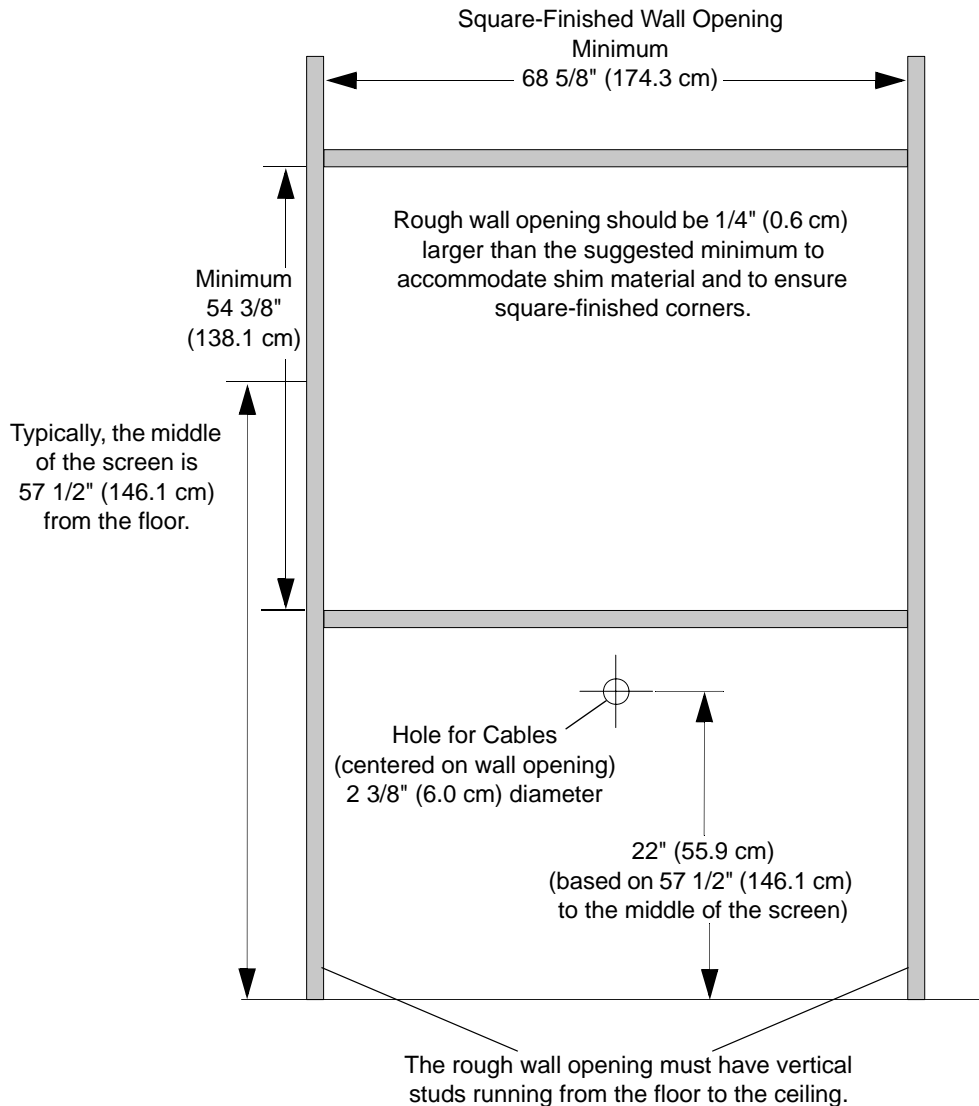

SMART Order Number

WRPSB 1910-DV

In-Wall Rear Projection SMART Board 1910 interactive whiteboard

93-00360

Optional 20' (6.1 m) straight-through DB9F-to-DB9F serial cable. Must be ordered separately for systems that don't support USB connections.

SMART Technologies Inc.
1207 – 11 Avenue SW, Suite 300
Calgary, AB T3C 0M5
CANADA
Phone +1.403.245.0333
Toll Free 1.888.42.SMART (Canada/U.S.)
info@smarttech.com www.smarttech.com

SMART
Technologies

© 2003–2006 SMART Technologies Inc. All rights reserved. SMART Board, Notebook, Whisper-tip, DVIT, AirLiner and the SMART logo are trademarks of SMART Technologies Inc. Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the U.S. and other countries. All other third-party product and company names may be trademarks of their respective owners. U.S. Patent Nos. 5,448,263; 6,141,000; 6,326,954; 6,337,681; 6,741,267; 6,747,636; 6,803,906; 6,919,880; 6,947,032; 6,954,197 and 6,972,401. Canadian Patent No. 2,058,219. Other U.S., Canadian and foreign patents pending. Specifications are subject to change without notice. 06/2006.