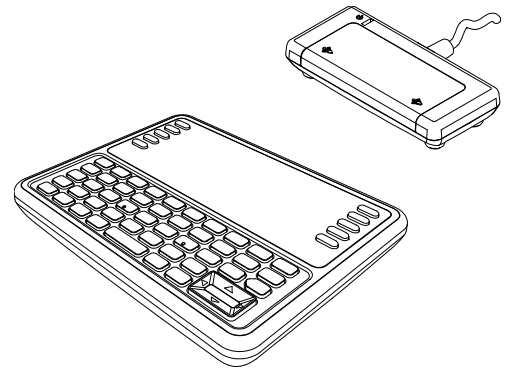Specifications

SMART Response™ XE Interactive Response System

Receiver and clicker

Physical specifications

Receiver size	4 5/8" W × 7/8" H × 2 1/8" D (119 mm × 22 mm × 54 mm)
Receiver weight	5 3/4 oz. (165 g)
Clicker size	4 5/8" W × 3 9/16" H × 7/8" D (119 mm × 91 mm × 22 mm)
Clicker weight	4 1/8 oz. (117 g) with batteries
Shipping size	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)
Shipping weight	24 clicker set – 15 lb. 1 oz. (6.8 kg) 32 clicker set – 18 lb. 3 oz. (8.2 kg) 40 clicker set – 21 lb. 5 oz. (9.7 kg)

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

Standard features

Software	SMART Response™ 2010 assessment software, including SMART Notebook™ collaborative learning software 10, for Windows® and Mac computers is included on the DVD. Software upgrades are available at www.smarttech.com/Downloads.
Technology	IEEE 802.15.4
Radio frequency	2400 MHz to 2483.5 MHz ISM band
Capacity	Supports up to 100 clickers with SMART Response XE receiver.

Extraordinary made simple™ | SMART™

Computer requirements

Windows operating systems

Pentium® III 750 MHz or later processor

512 MB of RAM (1 GB recommended)

800 MB of free hard disk space for minimum installation
(2150 MB for full installation with Gallery collections)

Windows XP, Windows Vista® or Windows 7 operating system

Internet Explorer® Internet browser 6.0 or later

Adobe® Flash® Player 10 plug-ins for Internet Explorer and Firefox® browsers
(provided with SMART Response)

Adobe Reader® 8.0 or later

Microsoft® DirectX® application programming interface 8.1 or later
(required for SMART Video Player)

Mac OS X operating system software

1 GHz PowerPC® G4 or G5 processor or Intel® processor (universal binary)

1 GB of RAM

800 MB of free hard disk space for minimum installation
(2 GB for full installation with Gallery collections)

Mac OS X 10.5.8 or 10.6.x operating system software

Safari application program 3.0.4 or later

Adobe Flash Player 10 plug-in (provided with SMART Response)

NOTES
- SMART Response assessment software runs on 32- and 64-bit operating systems.
- You're unable to use SMART Response software on Windows computers with Intel Itanium® processors.

Receiver features

Transmission power   6 dBm with a typical range of 100' (30 m)

Antenna   Integrated antenna

Host interface   USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

LED indicators   Multicolored LEDs indicate power, transmit data, receive data and link status.

Configuration   Plug and play (SMART Response software required)

Clicker features

Transmission power	6 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD display	1 1/16" H × 2 9/16" W (27.2 mm × 65.3 mm), 65° viewing angle and a contrast ratio of 6:1
Key pad	Full QWERTY keyboard with math symbols and function keys, soft keys, Power
Configuration	Plug and play (no additional software required)
Batteries	4 × AAA alkaline
Regulatory certification	IC (Industry Canada), C-Tick, CE, FCC, NOM
Environmental compliance	WEEE, RoHS (Europe), US CPSIA, US Packaging

Storage and operating specifications

Operating temperature	41°F to 95°F (5°C to 35°C)
Operating humidity	5% to 85% relative humidity, non-condensing
Storage temperature	-40°F to 131°F (-40°C to 55°C)
Storage humidity	5% to 90% relative humidity, non-condensing

SMART order numbers

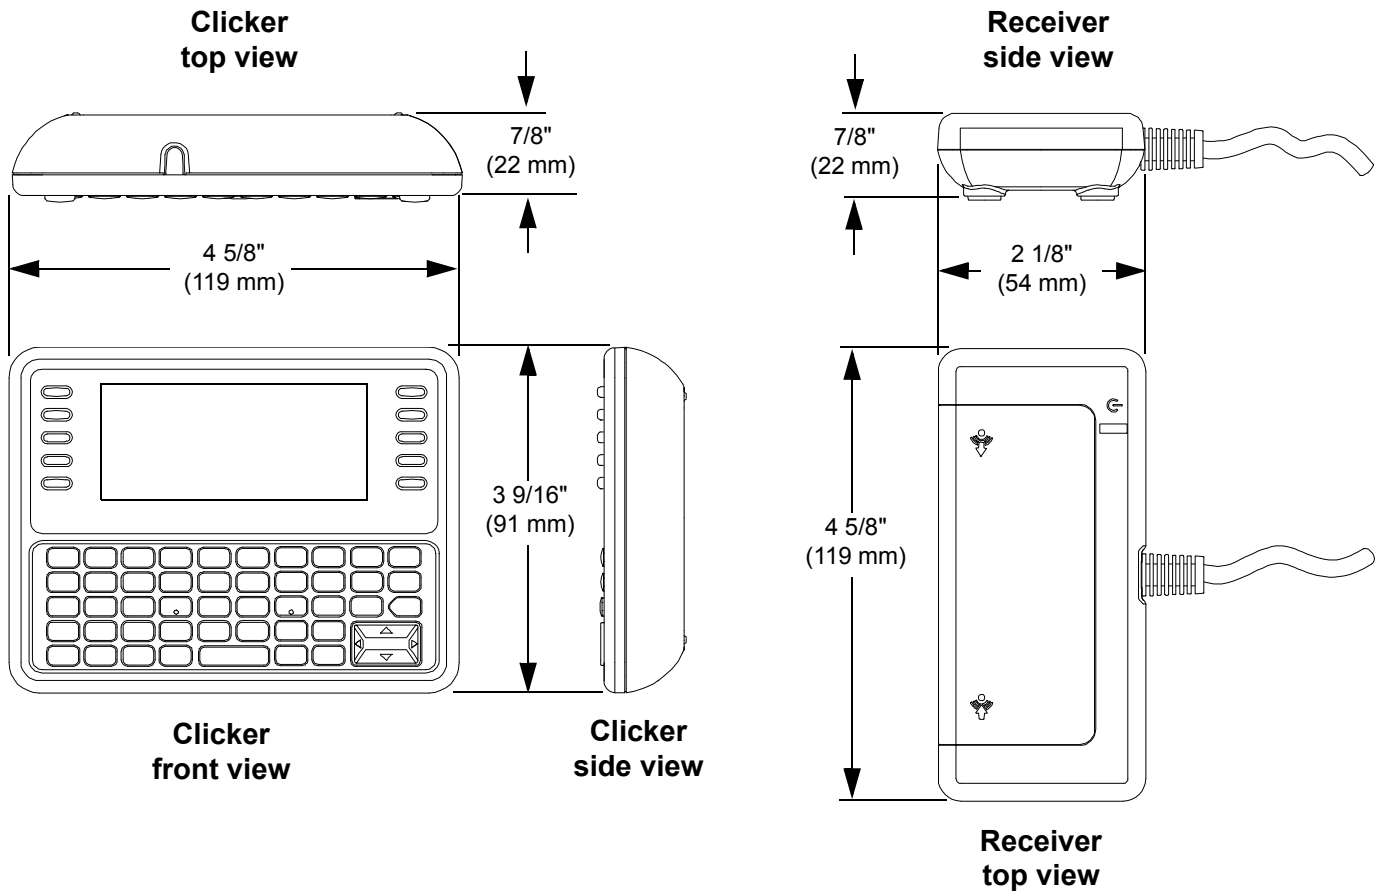|	
SRP-XE-24	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 96 AAA batteries, Quick Start Guide and software DVD
SRP-XE-32	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 128 AAA batteries, Quick Start Guide and software DVD
SRP-XE-40	Includes 1 receiver, 40 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 160 AAA batteries, Quick Start Guide and software DVD

Optional accessories

SRP-XE-RMT-1	Includes 1 clicker and 4 AAA batteries
SRP-XE-RMT-5	Includes 5 clickers and 20 AAA batteries
SRP-XE-RCV-1	Includes a receiver and a software DVD
SRP-XE-CC	Carrying case for 1 receiver and 40 clickers

Physical dimensions

**Clicker
top view**

7/8"
(22 mm)

4 5/8"
(119 mm)

**Receiver
side view**

7/8"
(22 mm)

2 1/8"
(54 mm)

3 9/16"
(91 mm)

4 5/8"
(119 mm)

**Clicker
front view**

**Clicker
side view**

**Receiver
top view**

SMART™