

Specifications


SMART GoWire™ auto-launch cable for SMART Meeting Pro™ and SMART Meeting Pro Premium software

Model GW-MP

Model GW-MPP

Physical specifications

| | |
|------------------------|---|
| Unit size | 4 1/8" W x 1 1/4" H x 5/8" D (10.4 cm x 3.1 cm x 1.6 cm) |
| Length | 7' (2.1 m) |
| Weight | 4 oz. (111 g) |
| Shipping size | 9 1/4" W x 6 1/2" H x 2" D (23.5 cm x 16.6 cm x 5 cm) |
| Shipping weight | 6 1/2 oz. (184 g) |

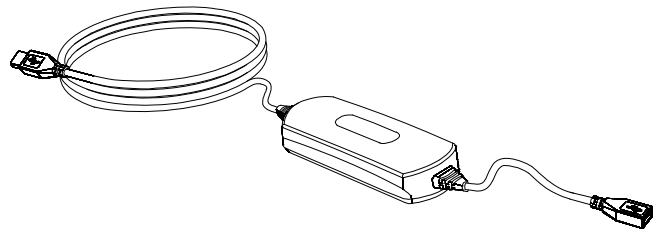

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

Standard features

| | |
|---------------------------------|---|
| Software | |
| GW-MP | SMART Meeting Pro™ software launches automatically when you connect your auto-launch cable to your computer. See the Release Notes for more information on SMART Meeting Pro software. |
| GW-MPP | SMART Meeting Pro Premium software launches automatically when you connect your auto-launch cable to your computer. See the Release Notes for more information on SMART Meeting Pro Premium software. |
| Connectors | USB plug and receptacle |
| Regulatory/certification | FCC, CE and VCCI |
| Warranty | One-year limited warranty |

Computer requirements

| | |
|-----------------|---|
| Hardware | 2 GHz Pentium® dual core processor or faster 1 GB RAM (Windows® XP) or 4 GB RAM (Windows 7) Discrete 128 MB Video card support for DirectX® technology 1 GB of free hard disk space 10 Mbps network connection (100 Mbps recommended) supporting TCP/IP Available powered USB or serial port |
| Software | Windows XP SP3 or Windows 7 operating system DirectX 9 technology or later (recommended) SMART Bridgit™ 4.2 software or later (optional) |

Storage and operating specifications

| | |
|------------------|--|
| Storage | -40°F to 104°F (-40°C to 40°C) |
| Operating | 32°F to 104°F (0°C to 40°C), up to 95% humidity (non-condensing) |

Physical dimensions

