# In-Wall Rear Projection SMART Board™ Interactive Whiteboard

#### **Specifications – Model 1910**

### **Physical Specifications**

 Size
  $72 \ 1/4$ " W ×  $55 \ 1/4$ " H ×  $2 \ 5/8$ " D

 Interactive Whiteboard
 (183.5 cm × 140.3 cm × 6.7 cm)

 Pen Tray with
  $38 \ 1/4$ " W ×  $9 \ 5/8$ " H ×  $4 \ 5/8$ " D

 Keyboard Bracket
 (97.2 cm × 24.4 cm × 11.8 cm)

Active Screen Area 67 1/4" W x 50 3/8" H

 $(170.8 \text{ cm} \times 128.0 \text{ cm})$ 84" (213.4 cm) diagonal

**Installation Information** 68 5/8" W × 54 3/8" H Minimum Wall Opening (174.3 cm × 138.1 cm)

The interactive whiteboard must be mounted


between two studs that run from floor to ceiling.

 Weight
 105 lb. (47.6 kg)

 Shipping Weight
 160 lb. (72.6 kg)

**Shipping Size**  $77" \text{ W} \times 65" \text{ H} \times 26" \text{ D}$ 

 $(195.6 \text{ cm} \times 165.1 \text{ cm} \times 66.0 \text{ cm})$ 



All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).

### **Standard Features**

**Software** SMART Notebook software included. See the <u>SMART Notebook software specifications</u> for a

complete list of system requirements. Software upgrades are available at

www2.smarttech.com/st/en-US/Support/SBS/.

**Pen Tray** Optical sensors in the pen tray detect when a pen or the eraser is lifted from the tray. LED

indicators show the active tool. Includes four pens (black, blue, red and green) and one eraser.

**Keyboard Bracket** Bracket attaches to the wall below the pen tray to hold the wireless keyboard and IR receiver

Wireless Keyboard US English Windows® operating system with built-in trackball (all regions except Japan)

**Resolution** Touch resolution approximately 2000 × 2000. Supports all projector resolutions up to

 $1600 \times 1200$ .

SMART Super Screen Bright image with uniform light distribution. Suitable for high ambient lighting, specifically

meeting rooms or videoconferencing rooms.

Screen Surface Material Extremely durable, low-reflection (matte) finish reduces glare from overhead lights

Digitizing Technology DViT™ (Digital Vision Touch) technology uses digital cameras to track an object interacting

with the display surface

**Projector** A projector is *not* included with this model of SMART Board interactive whiteboard. To take

advantage of all interactive features, you must integrate a projector.

Computer Connection A 21' 6" (6.6 m) SMART USB adapter cable is included

**Power Supply** A switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, with a 6' (1.8 m)

country-specific power cord

**Power Requirements** Power consumption is approximately 50 watts

Warranty Two-year limited equipment warranty


## Specifications – Model 1910


## **Storage and Operating Specifications**

Storage -40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing

**Operation** 41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing


### **Front and Side Views**

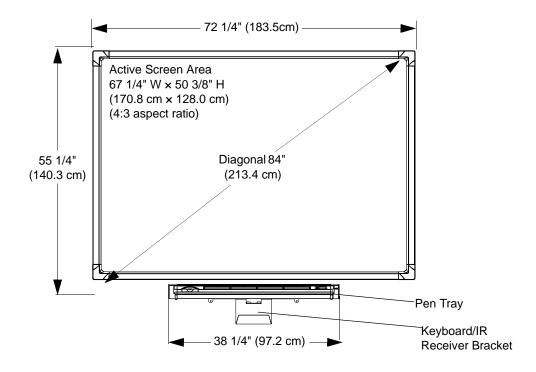

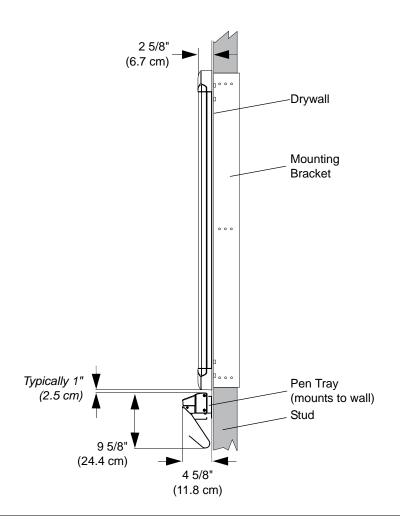

### Specifications - Model 1910

### **Wall Opening**

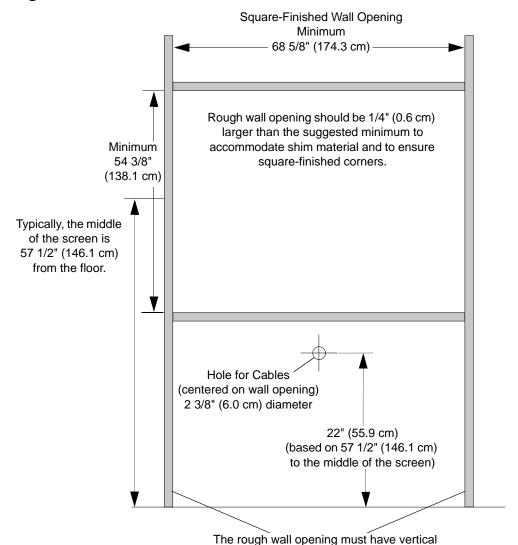

### **SMART Order Number**

**WRPSB 1910-DV** 

In-Wall Rear Projection SMART Board 1910 interactive whiteboard

studs running from the floor to the ceiling.

93-00360

Optional 20' (6.1 m) straight-through DB9F-to-DB9F serial cable. Must be ordered separately for systems that don't support USB connections.

