

Specifications

SMART Board® 8070i-G4 interactive flat panel

Model 8070i-G4-SMP

Overview

The SMART Board® 8070i-G4 interactive flat panel features SMART's proprietary DVIT® (Digital Vision Touch) technology on an LCD screen with e-LED backlight which enables you to select, write and erase on the interactive surface. By touching the surface, you can do everything on the interactive flat panel that you can do at your computer, and you can use an array of gestures within applications.

You can also write or draw over any application in digital ink using one of the supplied pens or your finger, and then erase the digital ink using the supplied eraser or your palm. Two users can write or draw at the same time.


The interactive flat panel has two presence detection sensors on its frame that can detect people up to 16' (5 m) away. When the sensors detect people in the room, the interactive flat panel turns on. When the sensors no longer detect people in the room, the interactive flat panel turns off.

See smarttech.com for more information on this product.



Dimensions and weights*

Dimensions

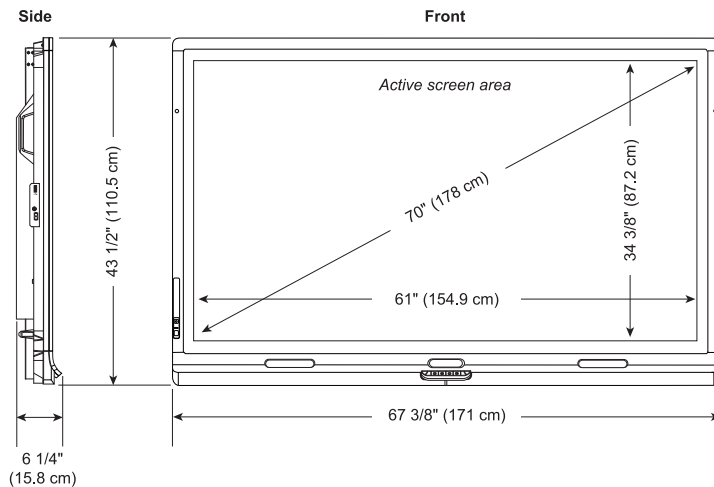

Weight

205 lb. (93 kg)

Shipping dimensions (including pallet)

77 1/8" W × 56 1/4" H × 15 3/8" D
(196 cm × 143 cm × 39 cm)

Shipping weight

251 lb. (114 kg)

*All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Display

Aspect ratio	16 × 9
Optimal resolution	1920 × 1080 at 60 Hz
Horizontal frequency	54–69.75 kHz (analog and digital)
Vertical frequency	48–62 Hz
Contrast ratio (typical)	4000:1
Brightness (typical)	180–250 cd/m ²
Pixel pitch	0.807 mm

Audio	Two 10 W integrated front firing speakers
--------------	---

Noise level	35 dBA
--------------------	--------

Included cables and hardware	8' (2.4 m) country-specific power cable 4' 3" (1.3 m) USB cable 16' 5" (5 m) USB extender 20' 8" (6.3 m) HDMI cable Infrared remote control (batteries included) Pens and eraser Spare nibs for pens	I/O extension module for external PCs (SBID-G4-XTM) CAT 5 USB extender SMART GoWire™ auto-launch cable with SMART Meeting Pro® PE software (see smarttech.com/kb/151506) M12 eye bolts
-------------------------------------	--	---

Mounting holes	For a standard VESA® 800 mm × 400 mm mounting plate 16 1/4" (41.2 cm) from the bottom of the interactive flat panel
-----------------------	--

Mounting bracket depth	Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the interactive flat panel to clear the wall
-------------------------------	---

Connectors

Top panel	19V DC Molex® Micro-Fit 2-pin connector Stereo 3.5 mm out USB 3.0 Type-A
------------------	--

Left panel	19V DC Molex Micro-Fit 2-pin connector Stereo 3.5 mm out USB 2.0 Type-A
-------------------	---

Right panel	19V DC Molex Micro-Fit 2-pin connector Stereo 3.5 mm out
--------------------	---

Back	AC power inlet	VGA in (×2)
	AC power pass-through	VGA out
	USB 2.0 Type-B	Component video in (Y, Pb, Pr)
	RS-232 in	Composite video in
	RS-232 out/pass-through	S-video in
	DisplayPort in	Stereo 3.5 mm in
	HDMI in (×2)	Dual RCA audio in (×2)
	DVI-D in	Dual RCA audio out
		Speaker wire connector, 8 Ω of resistance
<hr/>		
I/O extension module	HDMI in	
	USB 2.0 Type-B	

Installation requirements

Installation	See the <i>SMART Board 8000i-G4 interactive flat panel setup and maintenance guide</i> (smarttech.com/kb/170446)
---------------------	---

Computer	See smarttech.com/SMARTMeetingProReleaseNotes
-----------------	--

Storage and operating requirements

Power requirements	8.9A at 100V to 4.5A at 240V AC, 50 Hz to 60 Hz
---------------------------	---

Power consumption at 77°F (25°C)

Normal Standby mode	40 W
---------------------	------

Eco Standby mode	< 0.5 W
------------------	---------

Normal operating	310 W
------------------	-------

Operating temperature	41°F to 95°F (5°C to 35°C)
------------------------------	----------------------------

Storage temperature	-4°F to 140°F (-20°C to 60°C)
----------------------------	-------------------------------

Humidity	5% to 80% relative humidity, non-condensing
-----------------	---

Certification and compliance

Regulatory certification	UL (U.S. and Canada), FCC, IC, C-Tick, NOM, CU, CB, VCCI, KC, PSB and BIS
---------------------------------	---

Environmental compliance

China	EIP
-------	-----

European Union	REACH, RoHS, WEEE, Battery, Packaging and ErP Standby
----------------	---

U.S.	Packaging and Conflict Minerals
------	---------------------------------

Purchasing information

Order numbers

SBID 8070i-G4-SMP SMART Board 8070i-G4 interactive flat panel, including a SMART Meeting Pro software license key and a SMART GoWire cable with SMART Meeting Pro PE software

Optional accessories See smarttech.com/businessaccessories

Hardware warranty Two-year limited equipment warranty

LCD pixel policy See knowledgebase.force.com/articles/TROUBLESHOOTING/Limited-pixel-warranty-for-SMART-Board-8000i-series-interactive-flat-panels

smarttech.com/support

smarttech.com/contactsupport

© 2013–2014 SMART Technologies ULC. All rights reserved. SMART Board, DVIT, SMART Meeting Pro, SMART GoWire, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 06/2014.