

Specifications

SMART Board® 8084i-G4 interactive flat panel

Model 8084i-G4-SMP

Overview


The SMART Board® 8084i-G4 interactive flat panel features SMART's proprietary DViT® (Digital Vision Touch) technology on an LCD screen with e-LED backlight which enables you to select, write and erase on the interactive surface. By touching the surface, you can do everything on the interactive flat panel that you can do at your computer, and you can use an array of gestures within applications.

You can also write or draw over any application in digital ink using one of the supplied pens or your finger, and then erase the digital ink using the supplied eraser or your palm. Two users can write or draw at the same time.

The interactive flat panel has two presence detection sensors on its frame that can detect people up to 16' (5 m) away. When the sensors detect people in the room, the interactive flat panel turns on. When the sensors no longer detect people in the room, the interactive flat panel turns off.

See smarttech.com for more information on this product.

Dimensions and weights*

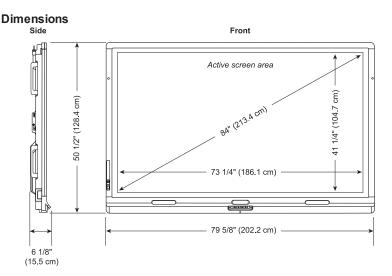

Weight

260 lb. (118.3 kg)

Shipping dimensions (including pallet)

86 1/4" W × 62 5/8" H × 15 1/8" D (219 cm × 159 cm × 38.5 cm)

Shipping weight

335 lb. (152.3 kg)

^{*}All dimensions \pm 1/8" (0.3 cm). All weights \pm 2 lb. (0.9 kg).

Hardware

Display

16 × 9 Aspect ratio

Optimal resolution 3840 × 2160 at 30 Hz

Horizontal frequency 244-280 kHz (analog and digital)

Vertical frequency 24-120 Hz

Contrast ratio (typical) 1600:1

Brightness (typical) 250-300 cd/m²

Pixel pitch 0.48 mm

Audio Two 10 W integrated front firing speakers

Noise level 35 dBA

Included cables and

8' (2.4 m) country-specific power cable hardware 4' 3" (1.3 m) USB cable

16' 5" (5 m) USB extender

20' 8" (6.3 m) HDMI cable Infrared remote control (batteries included)

Pens and eraser

Spare nibs for pens

I/O extension module for external PCs

(SBID-G4-XTM) CAT 5 USB extender

SMART GoWire™ auto-launch cable with SMART Meeting Pro™ PE (Personal Edition)

software (see smarttech.com/kb/151506)

M8 eye bolts

Mounting holes For a standard VESA® 600 mm × 400 mm mounting plate

18 7/8" (47.9 cm) from the bottom of the interactive flat panel

Mounting bracket depth Minimum depth of 1 5/8" (4.2 cm) for all components on the back of the interactive flat panel to

clear the wall

Connectors

Top panel 19V DC Molex® Micro-Fit 2-pin connector

> Stereo 3.5 mm out USB 3.0 Type-A

Left panel 19V DC Molex Micro-Fit 2-pin connector

> Stereo 3.5 mm out USB 2.0 Type-A

Right panel 19V DC Molex Micro-Fit 2-pin connector

Stereo 3.5 mm out

SMART Board 8084i-G4 interactive flat panel - Model 8084i-G4-SMP

Back AC power inlet VGA in

USB 2.0 Type-A Component video in (Y, Pb, Pr)

USB 2.0 Type-B (×2)

RS-232 in

RS-232 out/pass-through

DisplayPort in

Composite video in

Stereo 3.5 mm in

Stereo 3.5 mm out

Dual RCA audio in (×2)

HDMI in (\times 2) Speaker wire connector, 8 Ω of resistance

DVI-D in DVI-D out

I/O extension module HDMI in

USB 2.0 Type-B

Installation requirements

Installation See the SMART Board 8000i-G4 interactive flat panel setup and maintenance guide

(smarttech.com/kb/170446)

Computer See smarttech.com/SMARTMeetingProReleaseNotes

Storage and operating requirements

Power requirements 100V to 240V AC, 50 Hz to 60 Hz

Power consumption at 77°F (25°C)

Normal Standby mode 120 W

Normal operating 370 W

Maximum operating

(Vivid mode)

530 W

Operating temperature 41°F to 95°F (5°C to 35°C)

Storage temperature -4°F to 140°F (-20°C to 60°C)

Humidity 5% to 80% relative humidity, non-condensing

Certification and compliance

Regulatory certification UL (U.S. and Canada), FCC, IC, C-Tick, NOM, CU, CB, PSE, VCCI, KC, CCC, PSB and BIS

Environmental compliance

China EIP

European Union REACH, RoHS, WEEE, Battery, Packaging and ErP Standby

U.S. Packaging and Conflict Minerals

SPECIFICATIONS

SMART Board 8084i-G4 interactive flat panel - Model 8084i-G4-SMP

Purchasing information

Order number

SBID 8084i-G4-SMP

SMART Board 8084i-G4 interactive flat panel, including a SMART Meeting Pro software license key and a SMART GoWire cable with SMART Meeting Pro PE software

Optional accessories See smarttech.com/businessaccessories

Warranty Two-year limited equipment warranty

smarttech.com/support smarttech.com/contactsupport

© 2013–2014 SMART Technologies ULC. All rights reserved. SMART Board, DVIT, SMART Meeting Pro, SMART GoWire, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 01/2014.