

Specifications


SMART Board™ interactive whiteboard system

Model 690i5

Physical specifications

SMART Board 690 interactive whiteboard

Size	85 3/4" W × 49 1/2" H × 5 1/8" D (217.8 cm × 125.7 cm × 13 cm)
Active screen area (maximum interactive projected image)	82 1/8" W × 46 1/8" H (208.6 cm × 117.2 cm) 94 1/4" diagonal (239.3 cm) 16:9 aspect ratio
Weight	48 lb. (21.8 kg)
Shipping size	54" W × 94 1/2" H × 5 1/2" D (137.2 cm × 240 cm × 14 cm)
Shipping weight	78 lb. (35.4 kg)

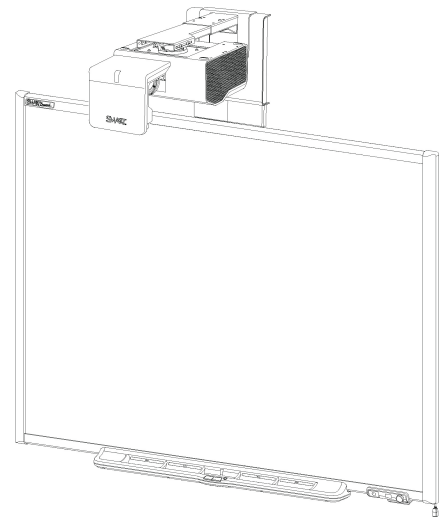

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

SMART UF75w projector

Projector	14" W × 15 1/2" H × 29 3/4" D (35.6 cm × 39.4 cm × 75.6 cm)
Remote control	1 5/8" W × 3 3/8" H × 1/4" D (4 cm × 8.6 cm × 0.7 cm)
Weight	17 lb. (7.7 kg)
Shipping size	20" W × 15 1/2" H × 24" D (50.8 cm × 39.4 cm × 61 cm)
Shipping weight	32 lb. (14.5 kg)

Extraordinary made simple™

SMART™

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

Extended control panel (ECP)

Size	6" W × 2 5/8" H × 2 1/4" D (15.2 cm × 6.6 cm × 5.8 cm)
Shipping size	9 3/8" W × 5" H × 10 3/8" D (23.8 cm × 12.8 cm × 26.4 cm)
Shipping weight	4 lb. 8 oz. (2.1 kg)

Standard features

System requirements	Windows® operating systems or Mac operating system software as detailed in the SMART Notebook™ software for Windows and Mac computers release notes (smarttech.com/kb/158853) or Linux® operating systems as detailed in the SMART Notebook software for Linux computers release notes (smarttech.com/kb/146487).
Software	A software DVD with SMART Product Drivers and SMART Notebook software is included. Software upgrades are available from smarttech.com/software .
Environmental compliance	China EIP, EU WEEE, US CPSIA, Covered Electronics Devices, Packaging, Batteries and EU RoHS
Regulatory certification	Interactive whiteboard CE, CSA (U.S./Canada), C-Tick, and VCCI Projector CB (TUV), CCC, CE, C-Tick, FCC, GOST-R, KC, NOM, PSB, PSE, TUV-GS, UL (U.S./Canada) and VCCI
Warranty	The projector and ECP have a three-year limited equipment warranty. The SMART UF75w projector lamp has a 1000-hour/one-year warranty. Your interactive whiteboard has a two-year limited equipment warranty or a five-year limited equipment warranty upon registration. See warranty documents for details.
Installation instructions	The installation instructions for your SMART Board 690i5 interactive whiteboard system are included in the ECP box. Don't use the installation instructions included in the interactive whiteboard box when installing the interactive whiteboard system. Additional documentation is available from smarttech.com/support .
Power consumption	287.5 W average in Standard mode and less than 1 W in Standby mode in accordance with EuP regulations
Cables	Includes the necessary cables to connect the projector to the ECP. However, you must supply the appropriate input cables for your devices.

Interactive whiteboard features

Pen tray	Optical sensors in the pen tray detect when you lift a pen or the eraser from the tray. Indicator lights indicate the active tool.
Pens and eraser	Black, red, green and blue pens and a rectangular eraser

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

Resolution	Touch resolution is approximately 4000 × 4000.
Screen surface	The hard-coated surface is tear resistant, optimized for projection, compatible with dry-erase markers and easily cleaned with whiteboard cleaner.
Digitizing technology	Resistive technology
Projector mounting template	Ensures simple installation and accurate alignment between your projector and your interactive whiteboard
Frame finish	Two-tone gray (Dark gray approximates PANTONE® Charcoal Gray 18-0601 TPX. Light gray approximates PANTONE Cool Gray 6C.)
Wall-mount brackets	Includes two 32" (81.3 cm) wide brackets, ten screws and ten drywall anchors to support your wall-mounted interactive whiteboard
Computer connection	16' (5 m) USB cable
Power requirements	Obtains power from the projector through the ECP cable.
Theft prevention	The pen tray has a locking feature and a Kensington® security slot.
SMART UF75w projector features	
System components	SMART UF75w projector, wall mount, ECP, remote control and all input cables necessary to connect the ECP to the projector
Image adjustment	The wall mount includes mechanical adjustments for aligning the projector image with the interactive whiteboard. The projector also has a focus lever and an on-screen menu for adjusting brightness, contrast and other image-related attributes.
Display type	WXGA 1280 × 720 when you select native 16:9 aspect ratio from the service menu
Display technology	The projection engine uses DLP® technology by Texas Instruments™, providing BrilliantColor™ performance and quality Gamma 2.2 correction with Bright Room, Dark Room, sRGB, User and SMART Presentation modes.
3D technology	3D-ready projector using DLP Link™ technology
Brightness	Estimated at 2500 lumens (typical) at a CCT of 6500 K by the IEC method
Lamp life	2500 hours in Standard 230 W mode. 4000 hours in Economy 190 W mode
Aspect ratio	16:9 with support for 16:10, 4:3 and 5:4 ratios with scaling
Contrast ratio	2900:1

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

Video system compatibility NTSC, NTSC 4:43, PAL, PAL-N, PAL-M and SECAM

Video interface compatibility HDCP compliant HDMI, Composite, S-video, VESA® RGB with additional interface support for Component YPbPr and Component YCbCr inputs with the proper adapters (not included)

Video format compatibility The projector has a native 16:9 aspect ratio XGA resolution, which you must select through the service menu, and supports VGA, SVGA, SXGA, Quad VGA, SXGA+ and UXGA formats with scaling.

Synchronization Auto image synchronization (auto tracking, frequency, position adjustment, source detect and phase detect)

Mounting hardware Includes hardware for mounting the projector to framed and solid walls. Also includes a safety tether.

Input/output connections

Connector	Connects to
Power	Main power source
4-pin power mini-DIN 5V/2A output	ECP harness cable
7-pin mini-DIN	ECP harness cable
DB9 RS-232	Optional room control system
DB15F RGB video input (VGA 1)	Default primary computer (not included)
DB15F RGB video input (VGA 2)	Default secondary computer harness cable
3.5 mm phone jack audio input (×2)	Primary and secondary computer audio inputs
DB15F RGB video output (VGA Out)	Optional secondary display (not included)
3.5 mm phone jack audio output	External audio system (not included)
RCA composite video input (and left and right RCA audio input)	Video source (not included) through ECP harness cable
4-pin mini-DIN S-video input (and left and right RCA audio input)	Video source (not included)
RJ45	Network (for web page management and SNMP access)
USB B	Computer (for service access only)
HDMI input	High-definition video source (not included)

Projector noise 36 dBA at high speed and 31 dBA at standard speed, measured using the JIS method

Power requirements 100V–240V AC at 50 Hz–60 Hz

Power cable Includes a 14' 9" (4.5 m) power cable

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

- External control** The RS-232 control connector is configured to accept control codes from your computer or a room control system.
- Remote control** Provides an alternative method of controlling the projector and adjusting the projector settings
- Theft protection** The projector system features an optional padlocked ring to prevent theft. The Kensington® security slot can affix the system to a wall as a visual and physical theft deterrent.

ECP features

Input/output connections

Connector	Connects to
RJ11 6-wire	SMART Hub™ SE collaboration platform
DB15-M	ECP harness cable to projector
RCA (×3)	Composite video and associated audio inputs
USB A	SMART Board 690 interactive whiteboard
USB A (×3)	USB drives or peripheral devices (not included)
USB B	Primary computer (desktop label)
USB B	Secondary computer (laptop label)

- Volume control** Controls volume
- Power button** Turns the interactive whiteboard and projector on and off
- Input selection button** Select the projector video and audio inputs from the available sources:
- VGA 1 (default primary computer)
 - VGA 2 (default secondary computer)
 - Composite
 - S-video
 - HDMI

Storage and operating specifications

- Storage**
- Maximum storage temperature: 122°F (50°C) with up to 80% humidity, non-condensing
 - Minimum storage temperature: -4°F (-20°C) with up to 80% humidity, non-condensing

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

- Operation**
- At standard fan speed: 41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m)
 - At high fan speed: 41°F to 95°F (5°C to 35°C) from 6000' to 6800' (1800 m to 2100 m)
 - In Service mode: 41°F to 95°F (5°C to 35°C) from 6800' to 9800' (2100 m to 3000 m)

SMART order numbers

- SB690i5** SMART Board 690 interactive whiteboard with a SMART UF75w projector
- 20-01501-20** Lamp module replacement kit for SMART UF75 and SMART UF75w projectors


Optional accessories

- RPEN** Replacement set of four pen tray pens (black, red, green and blue)
- RPEN-ER** Replacement set of four pen tray pens (black, red, green and blue) and a rectangular eraser
- SBA-L** Projection Audio System for SMART Board 600 and 800 series interactive whiteboard systems
- USB-XT** USB extender cable

SPECIFICATIONS

SMART Board interactive whiteboard system – Model 690i5

Physical dimensions

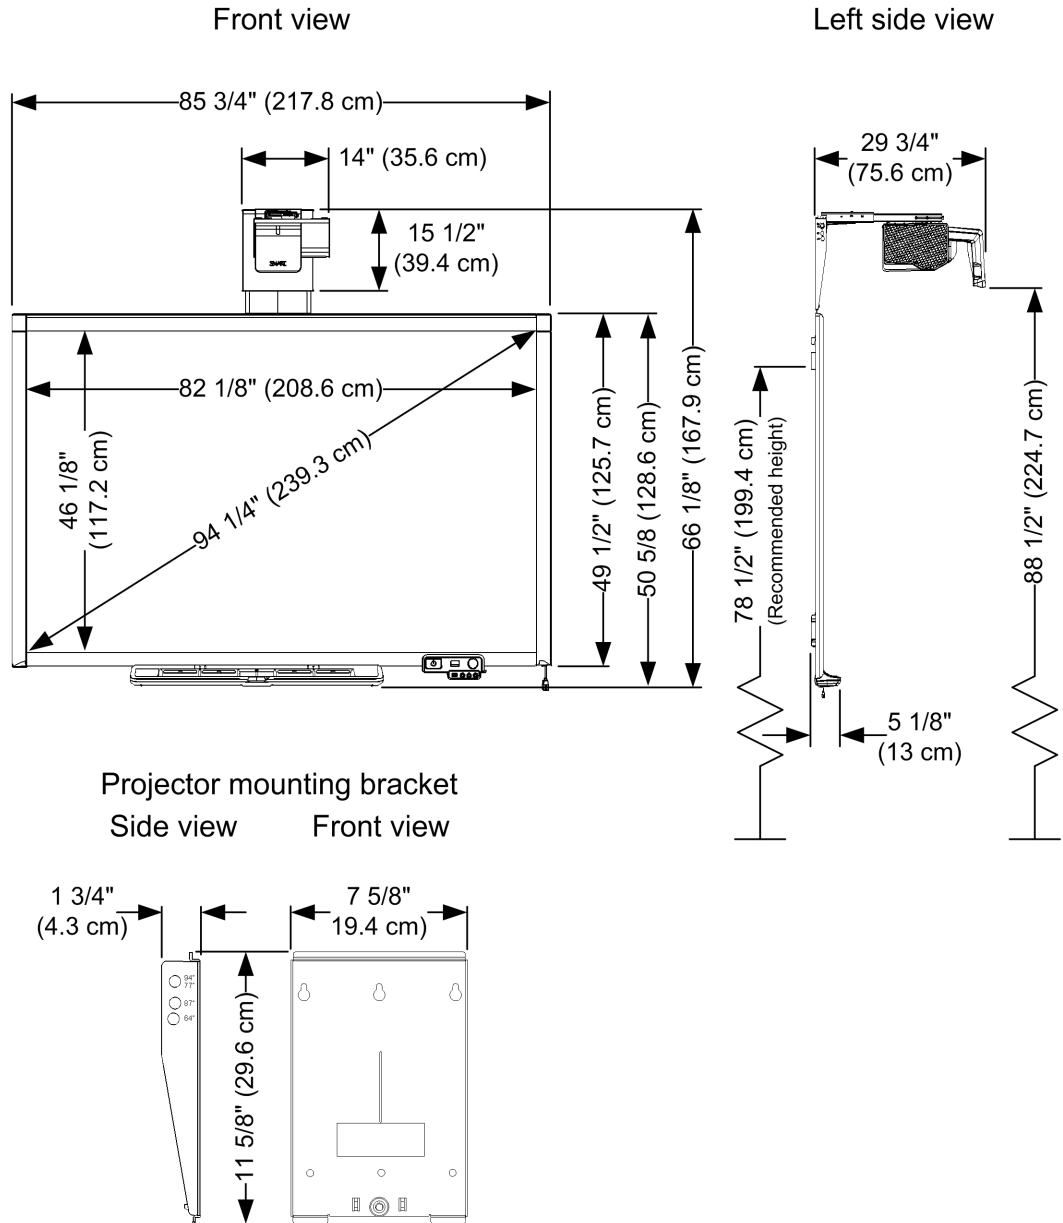

www.smarttech.com/support | www.smarttech.com/contactsupport
 Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

© 2011 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, SMART Hub, the SMART logo, smarttech and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. DLP Link, DLP, BrilliantColor and Texas Instruments are trademarks of Texas Instruments. All other third-party product and company names may be trademarks of their respective owners. One or more of the following patents: US6320597; US6326954; US6540366; US6741267; US7151533; US7687736; US7757001; USD616462; and USD617332. Other patents pending. Contents are subject to change without notice. 08/2011.