


Senteo™ Interactive Response System

Specifications – Receiver and Clicker

Physical Specifications

Receiver Size	4 3/4" W × 7/8" H × 2 1/4" D (12 cm × 2.2 cm × 5.7 cm)
Receiver Weight	5 3/4 oz. (165 g)
Clicker Size	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.5 cm)
Clicker Weight	7 1/4 oz. (100 g) without batteries
Shipping Weight	24 clicker set – 12 lb. (5.4 kg) 32 clicker set – 14 lb. (6.3 kg)
Shipping Size	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)

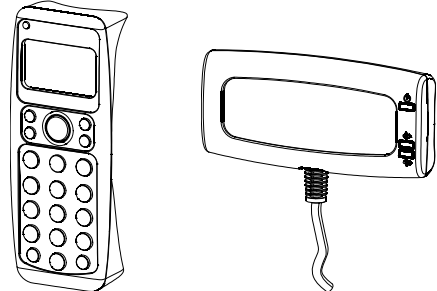

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	Senteo™ assessment software version 2.0, including SMART Notebook 10 for Windows® and Mac computers, is included on CD. Software upgrades are available at http://www2.smarttech.com/st/en-US/Support/Downloads/ .
Technology	RF 802.15.4
Radio Frequency	2.40 GHz to 2.50 GHz ISM band
Capacity	Supports up to 60 clickers with Model 1.1.3 receiver, and up to 40 clickers with Model 1.0.19 receiver.

Receiver Features

Transmission Power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
Host Interface	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
LED Indicators	Red and green LEDs indicate transmit and receive traffic and link status.
Configuration	Plug and play (Senteo assessment software required)

Clicker Features

Transmission Power	0 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD Display	1" H × 1 5/8" W (24.6 mm × 41.6 mm), 100° viewing angle and a contrast ratio of 30:1
Key Pad	Buttons include: numbers 0–9, letters A–J, TRUE (T), FALSE (F), YES (Y), NO (N), QUESTION MARK (?), PLUS/MINUS (±), FORWARD SLASH (/), UP, DOWN, DELETE, MENU, POWER
Configuration	Plug and play (no additional software required)
Batteries	2 × AA Alkaline
Certifications and Compliance	CSA (Canada/U.S.), IC (Industry Canada), C-Tick, VCCI, CE, FCC, RoHS (Europe), WEEE
Warranty	Two-year limited equipment warranty

Storage and Operating Specifications

Operating Temperature	32°F to 104°F (0°C to 40°C)
Operating Humidity	5% to 90% relative humidity
Storage Temperature	-40°F to 140°F (-40°C to 60°C)
Storage Humidity	5% to 90% relative humidity

SMART Order Numbers

SNT-24	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
SNT-32	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 64 AA batteries, Quick Start Guide and software CD
SNT-RMT-1	Includes 1 clicker and 2 AA batteries
SNT-RMT-5	Includes 5 clickers and 10 AA batteries
SNT-RCV	Includes a receiver, Quick Start Guide and software CD
SNT-CC	Carrying case for 1 receiver and 40 clickers

Dimensions

