


Specifications

SMART Response™ LE Interactive Response System

Receiver and Clicker

Physical Specifications

Receiver Size	4 3/4" W x 7/8" H x 2 1/4" D (12 cm x 2.2 cm x 5.7 cm)
Receiver Weight	5 3/4 oz. (165 g)
Clicker Size	2 1/4" W x 5 5/8" H x 1 1/8" D (5.7 cm x 14.2 cm x 2.8 cm)
Clicker Weight	7 1/4 oz. (200 g) without batteries
Shipping Size	
24 Clicker System (SRP-LE-24)	22 5/8" W x 7 3/4" H x 13 5/8" D (57.5 cm x 19.8 cm x 34.5 cm)
18 and 12 Clicker System (SRP-LE-18/SRP-LE-12)	17 1/2" W x 11" H x 8 3/8" D (44.4 cm x 27.9 cm x 21.1 cm)
Shipping Weight	SRP-LE-24 – 12 lb. (5.4 kg) SRP-LE-18 – 10 lb. (4.5 kg) SRP-LE-12 – 8 lb. (3.7 kg)

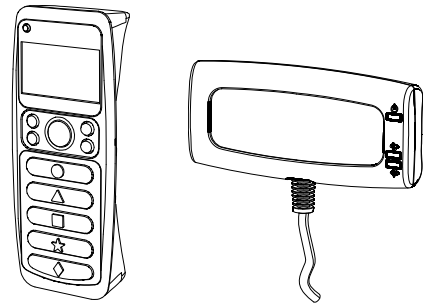

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	SMART Response 2009 assessment software, including SMART Notebook™ software 10 for Windows® and Mac computers is included on the CD. Software upgrades are available at http://www.smarttech.com/Downloads .
Technology	RF 802.15.4
Radio Frequency	2.40 GHz to 2.50 GHz ISM band
Capacity	Supports up to 60 clickers with Model 1.1.3 receiver

SMART Response Software Computer Requirements

Windows Operating Systems

Pentium® III 750 MHz or higher processor
512 MB of RAM (1 GB recommended)
750 MB of free hard disk space (minimum installation requirements)
2150 MB for full installation with Gallery content
Windows XP SP2 or later, Windows Vista® SP1 or Windows 7 operating system
Internet Explorer® Internet browser 6.0
Adobe® Flash® Player 10 or later
Adobe Reader® 8
Windows Media® Player 9 (required for SMART Recorder)
DirectX® technology 8.1 (required for SMART Video Player)

Mac Operating System Software

1 GHz Power PC® G4 or G5 or Intel® processor with 512 MB RAM
700 MB of free hard disk space (minimum installation requirements)
1500 MB for full installation with Gallery content
Mac OS X operating system software 10.5.x or 10.6.x
Safari application program 3.0.4 or later
Adobe Flash Player 10 or later

NOTE

SMART Response assessment software runs on 32-bit Windows and Mac operating systems only.

Receiver Features

Transmission Power

6 dBm with a typical range of 100' (30 m)

Antenna

Integrated antenna

Host Interface

USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

LED Indicators

Red and green LED indicate power, transmit data, receive data and link status.

Configuration

Plug and play (SMART Response software required)

Clicker Features

Transmission Power	6 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD Display	1 5/8" W x 1" H (41.6 mm x 24.6 mm), 60° to 80° viewing angle and a contrast ratio of 5:1
Key Pad	Buttons include: GREEN/CIRCLE, RED/TRIANGLE, BLUE/SQUARE, YELLOW/STAR, PURPLE/DIAMOND, ? (QUESTION MARK), UP, DOWN, HOME, ENTER, POWER
Configuration	Plug and play (no additional software required)
Batteries	2 x AA alkaline
Regulatory Certification	IC (Industry Canada), C-Tick, CE, FCC, SRRC (Pending), NOM (Pending)
Environmental Compliance	EU WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP
Warranty	Two-year limited equipment warranty

Storage and Operating Specifications

Operating Temperature	41°F to 95°F (5°C to 35°C)
Operating Humidity	5% to 85% relative humidity (non-condensing)
Storage Temperature	-40°F to 131°F (-40°C to 55°C)
Storage Humidity	5% to 90% relative humidity (non-condensing)


SMART Order Numbers

SRP-LE-24	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
SRP-LE-18	Includes 1 receiver, 18 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 36 AA batteries, Quick Start Guide and software CD
SRP-LE-12	Includes 1 receiver, 12 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 24 AA batteries, Quick Start Guide and software CD

Optional Accessories

SRP-LE-RMT-5	Includes 5 clickers and 10 AA batteries
SRP-LE-RMT-1	Includes 1 clicker and 2 AA batteries
SRP-LE-RCV-1	Includes a receiver and software CD
SRP-LE-CC	Carrying case for 1 receiver and 40 clickers
SRP-LE-CC-SM	Carrying case for 1 receiver and 20 clickers

Physical Dimensions

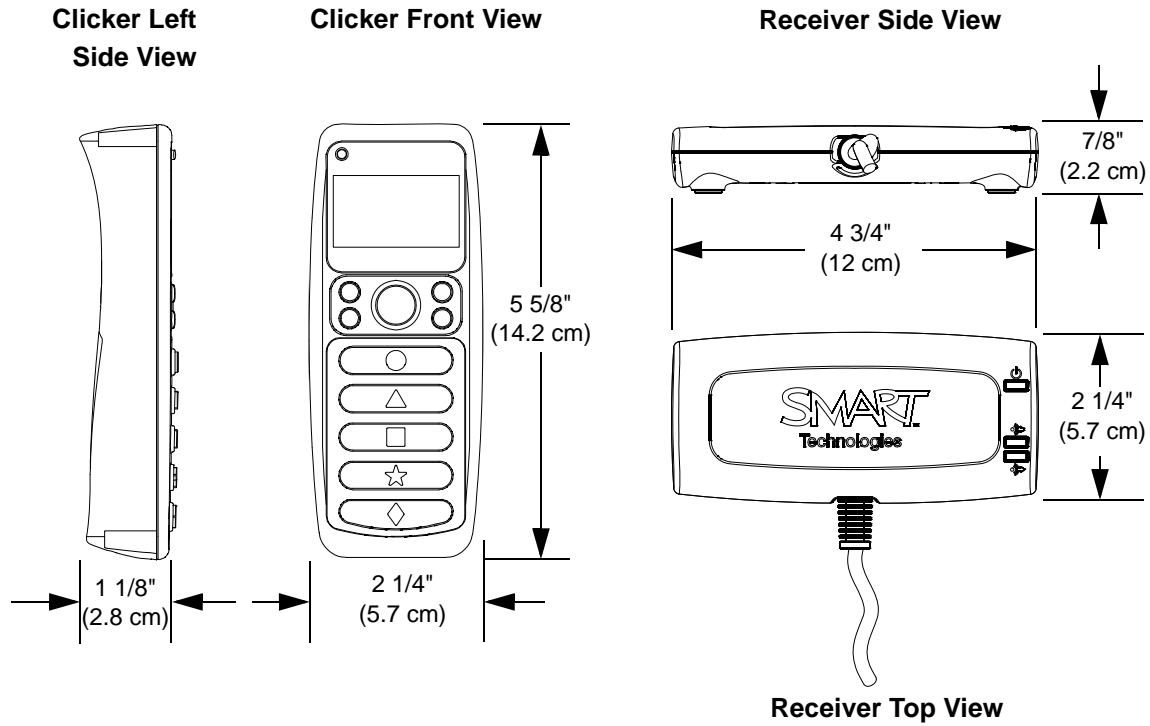

Viewing Angle

