


Specifications

SMART Response™ PE Interactive Response System

Receiver and Clicker

Physical Specifications

Receiver Size	4 3/4" W × 7/8" H × 2 1/4" D (12 cm × 2.2 cm × 5.7 cm)
Receiver Weight	5 3/4 oz. (165 g)
Clicker Size	2 1/4" W × 5 5/8" H × 1 1/8" D (5.7 cm × 14.2 cm × 2.8 cm)
Clicker Weight	7 1/4 oz. (200 g) without batteries
Shipping Size	22 5/8" W × 7 3/4" H × 13 5/8" D (57.5 cm × 19.8 cm × 34.5 cm)
Shipping Weight	24 clicker set – 12 lb. (5.4 kg) 32 clicker set – 14 lb. (6.3 kg)

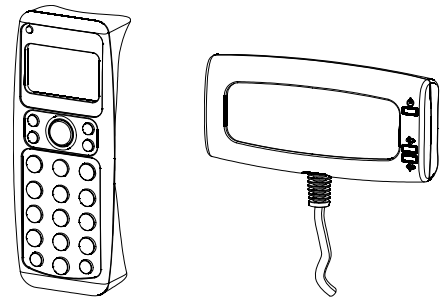

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

Standard Features

Software	SMART Response™ 2009 assessment software, including SMART Notebook™ collaborative learning software 10, for Windows® and Mac computers is included on the CD. Software upgrades are available at www.smarttech.com/Downloads .
Technology	RF 802.15.4
Radio Frequency	2.40 GHz to 2.50 GHz ISM band
Capacity	Supports up to 60 clickers with Model 1.1.3 receiver.

SMART Response Software Computer Requirements

Windows Operating Systems

Pentium® III 750 MHz or later processor

512 MB of RAM (1 GB recommended)

750 MB of free hard disk space for minimum installation
(2150 MB for full installation with Gallery collections)

Windows XP, Windows Vista® or Windows 7 operating system

Internet Explorer® Internet browser 6.0 or later

Adobe® Flash® Player 10 plugins for Internet Explorer Internet browser and Firefox® web browser (provided with SMART Response)

Adobe Reader® 8.0 or later

Microsoft® DirectX® application programming interface 8.1 or later
(required for SMART Video Player)

Mac OS X Operating System Software

1 GHz PowerPC® G4 or G5 processor or Intel® processor (universal binary)

512 MB of RAM

700 MB of free hard disk space for minimum installation
(1500 MB for full installation with Gallery collections)

Mac OS X 10.5.x or 10.6.x operating system software

Safari application program 3.0.4 or later

Adobe Flash Player 10 plugin (provided with SMART Response)

NOTES

- SMART Response assessment software runs on 32-bit operating systems only.
- You're unable to use SMART Response software on Windows computers with Intel Itanium® processors.

Receiver Features

Transmission Power

6 dBm with a typical range of 100' (30 m)

Antenna

Integrated antenna

Host Interface

USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

LED Indicators

Red and green LEDs indicate power, transmit data, receive data and link status.

Configuration

Plug and play (SMART Response software required)

Clicker Features

Transmission Power	6 dBm with a typical range of 100' (30 m)
Antenna	Integrated antenna
LCD Display	1" H × 1 5/8" W (24.6 mm × 41.6 mm), 100° viewing angle and a contrast ratio of 5:1
Key Pad	Buttons include Alphanumeric (A–J, 0–9 and texting A–Z), True (T)/Yes (Y)/Back, False (F)/No (N)/Forward, Question (?), +/–/Shift, Fraction/Decimal/Space, Up/Down, Delete, Menu, Power
Configuration	Plug and play (no additional software required)
Batteries	2 × AA alkaline
Regulatory Certification	IC (Industry Canada), C-Tick, CE, FCC, NOM (Pending)
Environmental Compliance	WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP

Storage and Operating Specifications

Operating Temperature	41°F to 95°F (5°C to 35°C)
Operating Humidity	5% to 85% relative humidity (non-condensing)
Storage Temperature	-40°F to 131°F (-40°C to 55°C)
Storage Humidity	5% to 90% relative humidity (non-condensing)


SMART Order Numbers

SRP-PE-24	Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD
SRP-PE-32	Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 64 AA batteries, Quick Start Guide and software CD

Optional Accessories

SRP-PE-RMT-1	Includes 1 clicker and 2 AA batteries
SRP-PE-RMT-5	Includes 5 clickers and 10 AA batteries
SRP-PE-RCV-1	Includes a receiver and software CD
SRP-PE-CC	Carrying case for 1 receiver and 40 clickers

Physical Dimensions

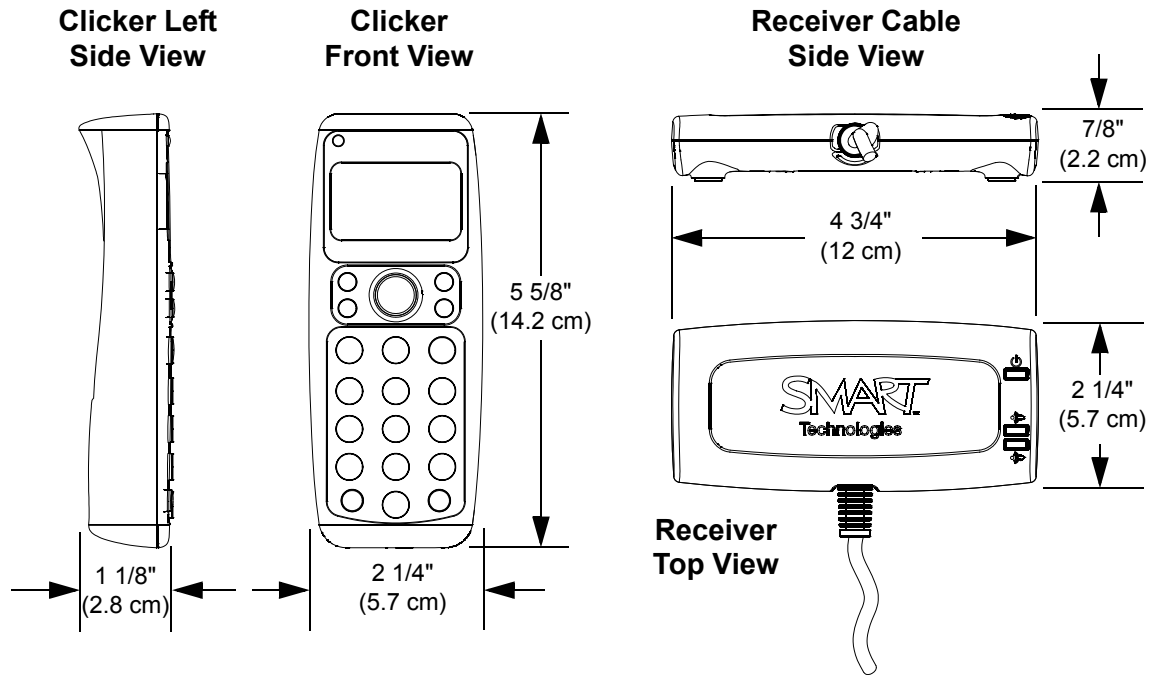

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)



©2007–2009 SMART Technologies ULC. All rights reserved. SMART Response, SMART Notebook, the SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows, Windows Vista, Internet Explorer and DirectX are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Mac and Safari are trademarks of Apple, Inc. registered in the U.S. and other countries. Intel, Pentium and Itanium are trademarks of Intel Corporation in the U.S. and other countries. Adobe, Reader and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US6320597; US6326954; US6741267; US7151533; US7499033; and CA2252302. Other patents pending. Contents are subject to change without notice. 11/2009.