Specifications SMART Board[™] interactive whiteboard

Model 480

Physical specifications


Size 160.5 cm W × 127.2 cm H × 12.8 cm D (63 3/16" × 50 1/16" × 5 1/16")

Active screen area (maximum interactive projected image) 156.5 cm W × 117.3 cm H (61 5/8" × 46 3/16") 195.6 cm (77") diagonal

Weight 23.2 kg (51 lb.)

Shipping size 178 cm W × 136 cm H × 11 cm D 70" × 53 1/2" × 4 5/16"

Shipping weight 28.7 kg (63 lb. 3 oz.)



All dimensions +/- 0.3 cm (1/8"). All weights +/- 0.9 kg (2 lb.)





2 | SPECIFICATIONS - SMART BOARD INTERACTIVE WHITEBOARD - MODEL 480

Standard features

Software	SMART Product Drivers and SMART Notebook [™] collaborative learning software installation CDs are included. Software upgrades are available from <u>smarttech.com/</u> <u>software</u> .
System requirements	Windows® operating systems and Linux® operating systems. See documents <u>126571</u> and <u>146487</u> for a complete list of system requirements.
Environmental compliance	China EIP, EU WEEE, US CPSIA, Packaging and EU RoHS
Regulatory certification	CB, CE, CSA (U.S./Canada), FCC and VCCI
Warranty	Your interactive whiteboard has a two-year limited equipment warranty. See warranty documents for details.
	NOTE A digital projector isn't included with this model of SMART Board interactive whiteboard. To take advantage of all your interactive whiteboard's interactive features, you must integrate it with a digital projector.
Cables	Includes a 3 m (118 1/8") USB cable
Pen	A pen tray pen is included
Resolution	Digitizing resolution is approximately 32767 × 32767
Screen surface	The hard-coated steel surface is durable, optimized for projection, compatible with dry-erase markers and easily cleaned with whiteboard cleaner or isopropyl alcohol (IPA).
Digitizing technology	DViT™ (Digital Vistion Touch) technology
Frame finish	Dark gray (approximates Pantone® Charcoal Gray 18-0601 TPX)
Power requirements	Obtains power from the comptuer through the USB cable for Windows® and Linux® computers. Power consumption is less than 0.5 W (100 mA at 5 V).
Computer connection	12 Mbit/s USB connection (full-speed USB 1.1 or USB 2.0).
	Your SMART Board 480 interactive whiteboard supports one computer connection on a primary display only.

3 | SPECIFICATIONS - SMART BOARD INTERACTIVE WHITEBOARD - MODEL 480

Storage and operating specifications

- **Storage** -40°C to 50°C (-40°F to122°F)
- **Operation** 0° C to 35° C (32° F to 95° F)

SMART order numbers


SB480 195.6 cm (77") diagonal SMART Board 480 interactive whiteboard

Optional accessories

For more information on additional accessories for your SMART Board 480 interactive whiteboard, see <u>smarttech.com/accessories</u>.

4 | SPECIFICATIONS - SMART BOARD INTERACTIVE WHITEBOARD - MODEL 480

Physical dimensions

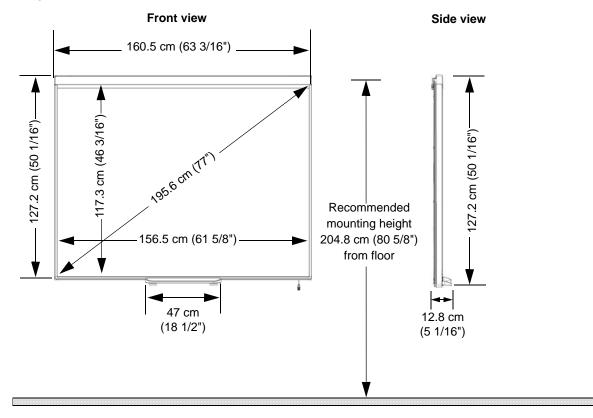

www.smarttech.com/support www.smarttech.com/contactsupport Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)



© 2010 SMART Technologies ULC. All rights reserved. SMART Board, SMART Notebook, smarttech, the SMART logo and all SMART taglines are trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6337681; US6421042; US6563491; US6674424; US6747636; US6760009; US6803906; US6829372; US6954197; US7184030; US728612; US7289113; US7342574; US7379622; US7532206; US761917; US7626577; US762625; US7751671; CA2058219; CA2386094; EP1297488; EP1739528; JP4053582; JP4052498; JP4057200; ZL0181236.0; and DE60124549; Other patents pending. Contents subject to change without notice. 12/2010.