


## Specifications

# SMART Response™ LE interactive response system

## Receiver and clicker

### Physical specifications

<b>Receiver size</b>	4 3/8" W x 7/8" H x 2 1/4" D (12 cm x 2.2 cm x 5.7 cm)
<b>Receiver weight</b>	5 3/4 oz. (165 g)
<b>Clicker size</b>	2 1/4" W x 5 5/8" H x 1 1/8" D (5.7 cm x 14.2 cm x 2.8 cm)
<b>Clicker weight</b>	7 1/4 oz. (200 g) without batteries
<b>Shipping size</b>	
32 and 24 Clicker System (SRP-LE-32/SRP-LE-24)	22 5/8" W x 7 3/4" H x 13 5/8" D (57.5 cm x 19.8 cm x 34.5 cm)
18 and 12 Clicker System (SRP-LE-18/SRP-LE-12)	17 1/2" W x 11" H x 8 3/8" D (44.4 cm x 27.9 cm x 21.1 cm)
<b>Shipping weight</b>	SRP-LE-32 – 14 lb. (6.4 kg) SRP-LE-24 – 12 lb. (5.4 kg) SRP-LE-18 – 10 lb. (4.5 kg) SRP-LE-12 – 8 lb. (3.7 kg)

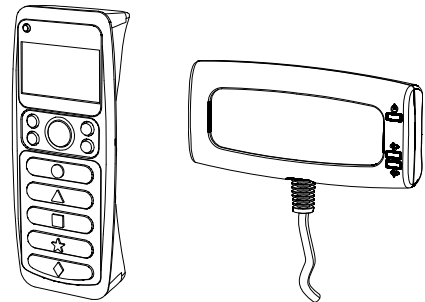

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

### Standard features

<b>Software</b>	SMART Response™ 2010 assessment software, including SMART Notebook™ collaborative learning software 10, for Windows® and Mac computers is included on the DVD. Software upgrades are available at <a href="http://smarttech.com/Downloads">smarttech.com/Downloads</a> .
<b>Technology</b>	RF 802.15.4
<b>Radio frequency</b>	2.40 GHz to 2.50 GHz ISM band
<b>Capacity</b>	Supports up to 60 clickers with Model 1.1.3 receiver

## SMART Response software computer requirements

### Windows operating systems

Pentium® III 750 MHz or later processor

512 MB of RAM (1 GB recommended)

800 MB of free hard disk space for minimum installation  
(2150 MB for full installation with Gallery collections)

Windows XP, Windows Vista® or Windows 7 operating system

Internet Explorer® Internet browser 6.0 or later

Adobe® Flash® Player 10 plug-ins for Internet Explorer and Firefox® browsers  
(provided with SMART Response)

Adobe Reader® 8.0 or later

Windows Media® Player 9 (required for SMART Recorder)

Microsoft® DirectX® application programming interface 8.1 or later  
(required for SMART Video Player)

---

### Mac operating system software

1 GHz PowerPC® G4 or G5 processor or Intel® processor (universal binary)

1 GB of RAM

800 MB of free hard disk space for minimum installation  
(2 GB for full installation with Gallery collections)

Mac OS X 10.5.8 or 10.6.x operating system software

Safari application program 3.0.4 or later

Adobe Flash Player 10 plug-in (provided with SMART Response)

### NOTES

- SMART Response assessment software runs on 32-bit Windows and Mac operating systems.
  - You're unable to use SMART Response software on Windows computers with Intel Itanium® processors.
-

### Receiver features

<b>Transmission power</b>	6 dBm with a typical range of 100' (30 m)
<b>Antenna</b>	Integrated antenna
<b>Host interface</b>	USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable
<b>LED indicators</b>	Red and green LED indicate power, transmit data, receive data and link status.
<b>Configuration</b>	Plug and play (SMART Response software required)

### Clicker features

<b>Transmission power</b>	6 dBm with a typical range of 100' (30 m)
<b>Antenna</b>	Integrated antenna
<b>LCD display</b>	1 5/8" W × 1" H (41.6 mm × 24.6 mm), 60° to 80° viewing angle and a contrast ratio of 5:1
<b>Key pad</b>	Buttons include: GREEN/CIRCLE, RED/TRIANGLE, BLUE/SQUARE, YELLOW/STAR, PURPLE/DIAMOND, ? (QUESTION MARK), UP, DOWN, HOME, ENTER, POWER
<b>Configuration</b>	Plug and play (no additional software required)
<b>Batteries</b>	2 × AA alkaline
<b>Regulatory certification</b>	IC (Industry Canada), C-Tick, CE, FCC, SRRRC (Pending), NOM (Pending)
<b>Environmental compliance</b>	EU WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP
<b>Warranty</b>	Two-year limited equipment warranty

### Storage and operating specifications

<b>Operating temperature</b>	41°F to 95°F (5°C to 35°C)
<b>Operating humidity</b>	5% to 85% relative humidity (non-condensing)
<b>Storage temperature</b>	-40°F to 131°F (-40°C to 55°C)
<b>Storage humidity</b>	5% to 90% relative humidity (non-condensing)


### SMART order numbers

- SRP-LE-32** Includes 1 receiver, 32 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 64 AA batteries, *SMART Response LE Quick Start Guide* and software DVD
- SRP-LE-24** Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips No. 1 screwdriver, 48 AA batteries, *SMART Response LE Quick Start Guide* and software DVD
- SRP-LE-18** Includes 1 receiver, 18 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 36 AA batteries, *SMART Response LE Quick Start Guide* and software DVD
- SRP-LE-12** Includes 1 receiver, 12 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 24 AA batteries, *SMART Response LE Quick Start Guide* and software DVD


### Optional accessories

- SRP-LE-RMT-5** Includes 5 clickers and 10 AA batteries
- SRP-LE-RMT-1** Includes 1 clicker and 2 AA batteries
- SRP-LE-RCV-1** Includes a receiver and software DVD
- SRP-LE-CC** Carrying case for 1 receiver and 40 clickers
- SRP-LE-CC-SM** Carrying case for 1 receiver and 20 clickers

## Physical dimensions

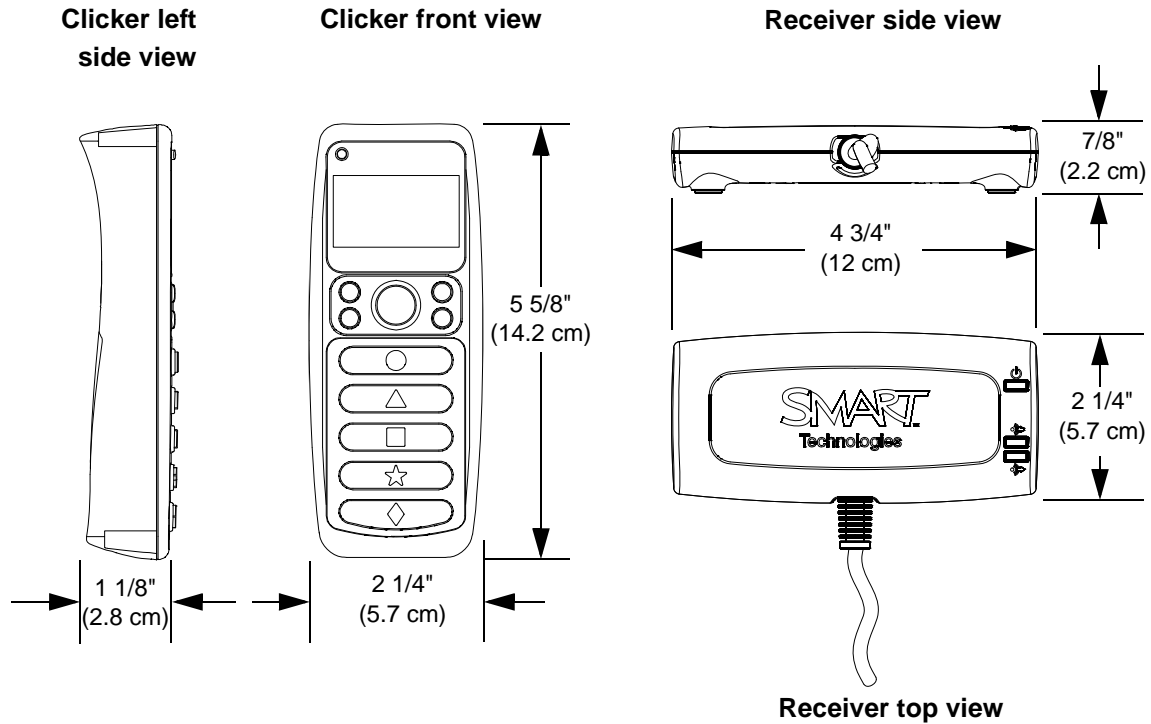

### Viewing angle

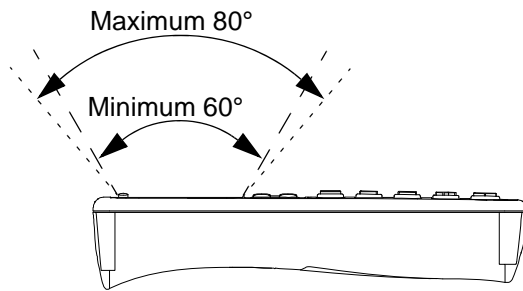

www.smarttech.com/support   www.smarttech.com/contactsupport  
 Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)



© 2007–2010 SMART Technologies ULC. All rights reserved. SMART Response, SMART Notebook, The SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows, Windows Media, Windows Vista, Internet Explorer and DirectX are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Mac and Safari are registered trademarks of Apple, Inc. Adobe, Reader and Flash are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US6320597; US6326954; US6741267; US7151533; US7499033; and CA2252302. Other patents pending. Contents are subject to change without notice. 09/2010.